

Befestigungsmöglichkeiten


Für Typ "Stahl-massiv" und Typ "Stahl-Blech"

Sicherungsring DIN 471

Bestell-Nr. Kugel Ø Bezeichnung
mm

20.150.01	15,0	A 24
20.220.01	22,0	A 36
20.300.01	30,0	A 45
20.450.01	45,0	A 63
20.600.01	60,0	A 105

Änderungen vorbehalten

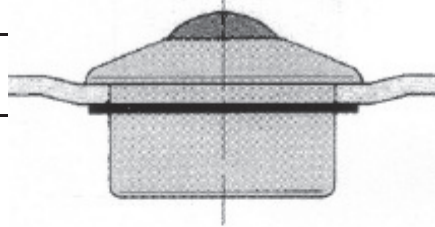


Zackenring

Bestell-Nr. Kugel Ø Bezeichnung
mm

20.150.02	15,0	ZR 24
20.220.02	22,0	ZR 35
20.300.02	30,0	ZR 45

Änderungen vorbehalten

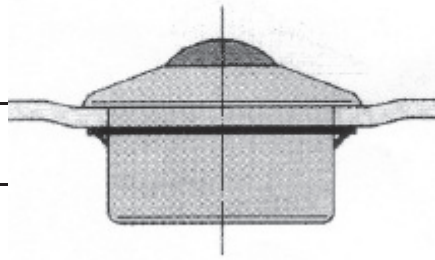


Krallefederring

Bestell-Nr. Kugel Ø Aufnahme- c
mm boh rung mm mm

20.150.03	15,0	25,00	2,0 - 4,0
20.220.03	22,0	37,00	2,0 - 4,0
20.301.03	30,0	46,00	2,0 - 4,0

Änderungen vorbehalten

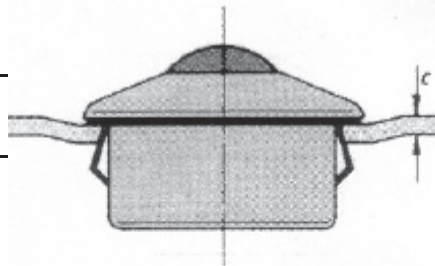

Toleranzhülsen

Bestell-Nr. Kugel Ø Aufnahme- d b
mm boh rung mm mm mm

20.150.04	15,0	25,70 - 25,75	24,5	7,0
20.220.04	22,0	37,67 - 37,75	36,5	12,0
20.300.04	30,0	46,67 - 46,75	45,5	12,0
20.450.04	45,0	64,03 - 64,15	62,5	15,0
20.600.04	60,0	102,42 - 102,56	100,5	19,0

Änderungen vorbehalten

